


Silca
SYSTEM

PRODUCT INFORMATION SHEET



Silca
SYSTEM

**STRUCTURAL SUPPORT GRATING
FOR ELEVATED
DECKS AND PATIOS**



Silca
SYSTEM

Silca System interlocking, structural deck grates are specifically designed for the support of heavy finished surface materials over elevated deck structure.

Manufactured in New Zealand from 100% recycled materials, our grates offer a robust, durable solution for installing tiles or pavers at any elevation.

Silca Grates connect together and are securely fastened directly to timber or aluminium deck joists, or on adjustable pedestal over membrane. This provides a solid, flat, permeable surface to install various paving materials such as tiles, natural stone, heavy pavers, artificial turf or porcelain.


Silca System enables a free draining finished surface and air circulation beneath, preventing moisture buildup in the substructure and ensuring the longevity of the decking element. Suitable for standard above-ground decks or over membrane roof and balconies.

Compliance to B1/VM1 and B2 of AS/NZS1170.1. and E2/AS1 Permeable surface - level entry through threshold. Silca System is an environment-friendly patio solution for both residential and commercial applications.



merx
pacific



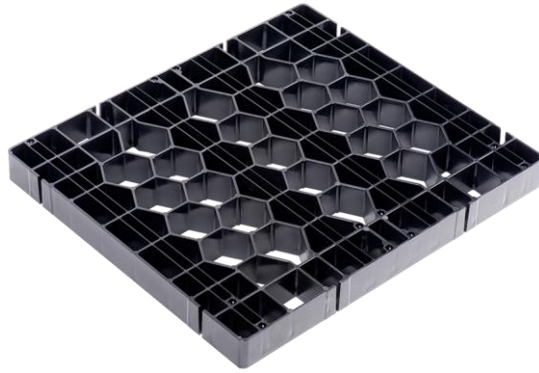


Proudly NZ Made
100% recycled plastics



Elevated or Raised Decks

Transform a sloping yard or second-story living area into a stunning, functional outdoor space with Silca System. Perfect for areas where a ground-level slab is impractical and wooden or composite decking is undesirable.

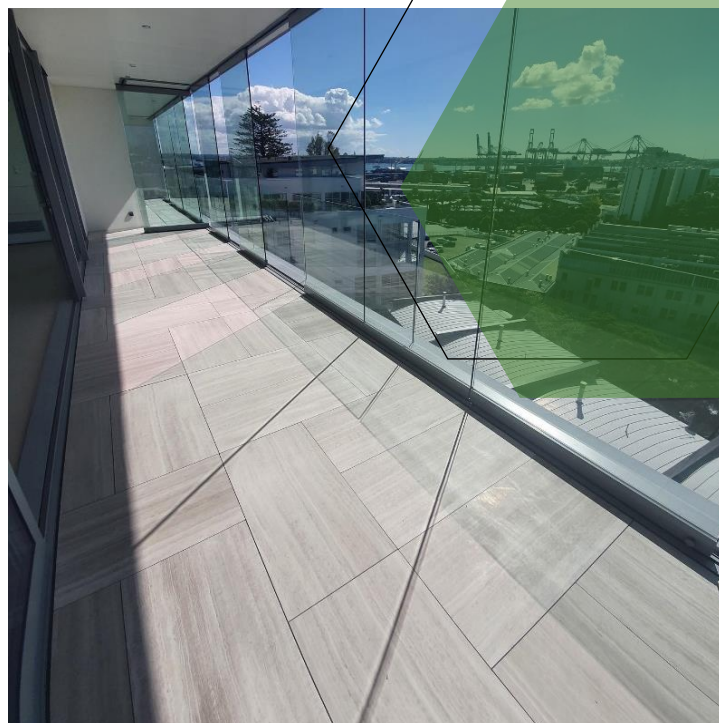

Balconies

Design and maintain second-story balconies or apartment terraces effortlessly with Silca System. Pair it with a natural stone or tile finish for a clean, stylish look with level entry through threshold. Residential or Commercial.

Over Membrane, Slab, or Flat Roof

Convert membrane roof spaces into a functional, entertaining areas with Silca System. Installation either on Buzon adjustable pedestals or a robust joist system such as Outdure. A superior floating patio element.



Pool Decks

Ideal for both in-ground and above-ground pools, Silca System allows the installation of a durable free-draining finished surface. Create resort style, low maintenance pool patios that withstand wet conditions and heavy use.



Product	Description and features	Product Code
 	<p>Silca Grates The key element to the Patented Silca System is the Grate. This is the 400x450x38mm structural component that screws direct to the timber or aluminium deck frame and provides the solid flat surface on which to lay almost any kind of paving. (5.5 per sqm)</p> <p>Features:</p> <ul style="list-style-type: none"> a) strengthening ribs and hex cells to spread and transfer load across the decking element and down onto the joist. b) pre-formed countersunk holes designed to guide the screws into the joist at the correct position. c) a second row of fixing so grates can be uniformly trimmed to slot in between joists should more height clearance be required. d) free draining design for minimum moisture retention and maximum airflow. e) micro flex to absorb any movement within the decking element and reduce risk of any tile or grout disturbance f) UV stable g) manufactured from 100% recycled materials. Green Building Product 	6255BL0162A
 	<p>Silca Connectors Lock Connectors specifically designed for use with the Grates. (3.3 per grate) These interlock each Silca Grate to the next on all four sides. X2 Connectors per side and greatly increase rigidity and consistency across the system, resulting in an incredibly strong, continuous decking element. They also provide some added spot adhesion points for during tile install. We specify using Lock Connectors when Grates are installed over any floating frame, typically over membrane. For over solid timber deck frame they are not 100% required, however still greatly increase strength, stability and rigidity to the decking element.</p>	6461BL0000
	<p>Screw Fixings Timber Stainless Steel screws for fixing the grates to the timber joists of the deck substructure. (x6 Screws per Grate) These are designed to seat perfectly into the predesignated, countersunk holes at the edges of the Silca Grates. Coarse wood tread and long shank for optimum efficiency and hold.</p>	DCS30410G75-1000 DCS30410G75-500
	<p>Screw Fixings Aluminium Stainless Steel self-drilling WingTek screws for fixing the grates to the aluminium joists. (x6 Screws per Grate) Designed to seat perfectly into the predesignated, countersunk holes at the edges of the Silca Grates. No pre-drilling required.</p>	SSDCKG10060QW
	<p>Tile Adhesive For spot glue adhesion of tiles and pavers direct to the Silca Grates. (x1 600ml sausage per 2 sqm)</p> <p>SabreBond SMP45 is a high grade multipurpose adhesive that boasts extremely high flexibility for demanding applications. It is suited for both industrial bonding and sealing applications, and specialised construction sealing. It has a wide adhesion range to most construction materials, including most metals, timber and most plastics.</p>	1300161



ADVANTAGES WHEN SPECIFYING SILCA SYSTEM

Versatile Applications: Ideal for decks, patios, stairs, ramps, paths, bridges, docks, pool areas, and various residential and commercial projects.

Innovative Construction Product: A revolutionary and unique system supporting any type of paving on timber or aluminum deck joists.

Environmentally Friendly: Made from 100% recycled materials, offering a sustainable alternative to hardwood decking.

New Zealand Made: A trusted product originally established in the USA and Canada, now manufactured locally in New Zealand.

Maintenance-Free: Provides a durable, raised patio without the ongoing maintenance required by wooden decking.

All-Weather Durability: Maintains strength in extreme climates, from the Southern Alps' snow and ice to North Queensland's tropical heat and moisture.

Reduced Fire Risk: With non-combustible pavers, it prevents hot ash or embers from igniting the deck. A fire-retardant Silca Grate rated V-0 is available upon request.

Cost-Effective: More economical than hardwood decking options, and significantly cheaper than elevated concrete slabs. Substantial savings on installation labour.

Easy Installation: Quick to install, making it accessible for builders, contractors, and DIY homeowners.

Creative Design Flexibility: Supports various tile layout and pattern designs with various fascia options, allowing for unique outdoor spaces that enhance property value.

Superior Load-Bearing Capacity: The engineered design of Silca Grate cells supports heavy loads, preventing paver cracking or failure under heavy foot traffic or furniture.

Effective Load Distribution: Distributes load evenly across the joists and structure, providing robust support.


Adaptable Cutting: Easily cut around obstacles without compromising structural integrity, ensuring continuous support for cut pavers.

Enhanced Ventilation: Minimal surface contact between Silca Grate and joists maximizes airflow, aiding in ventilation and drying of the subdeck structure.


Structural: Acts as a structural component, reducing the need for nogging and supporting heavy surface laminates.

Flexible Paving Options: Allows for various paving patterns and joint designs, including full grout joints, drainage gaps, and French Laid patterns.

Solid, Flat Surface: Provides a stable base for nearly any type of paving, ensuring a smooth and reliable surface with a firm feel underfoot.

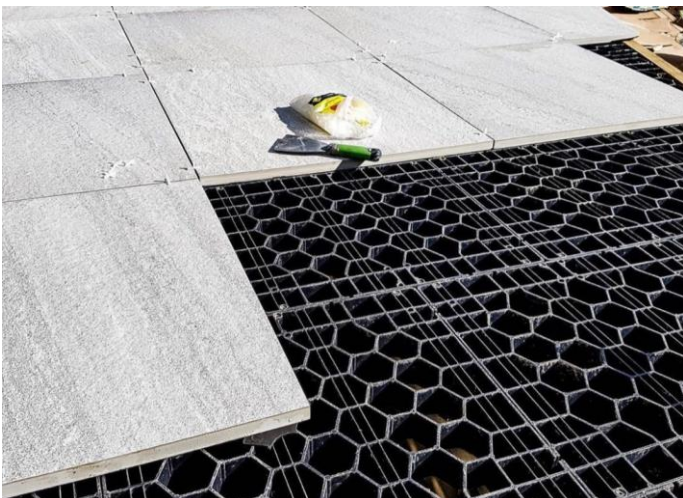

SILCA GRATES - SPECIFICATIONS	
Dimension	398.5 x 450 x 38mm
Material	PCABS - Recycled Polycarbonate ABS with UV Stabiliser
Coverage	0.180m ² (5.5 Units per m ²)
Weight per grate	1.814 kg
Floor loading with timber joist (refer to Design Statement and span tables)	(2kPa, 1.8kN) to (4kPa, 4.5kN)
Compliance	Clause B1/VM1 and B2 of NZS AS 1720.1:2022, and E2/AS1
Load deflection test (per grate)	5 ton + per unit (spanned)
Load compression test (per grate)	68 ton (with a 400mm ² paver)

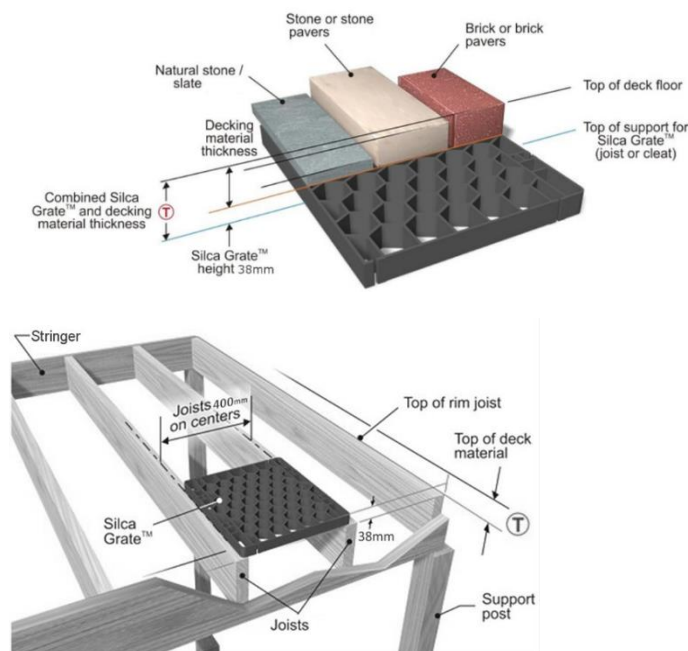

Install Silca System over typical timber joist deck structure or on adjustable pedestal over membrane.



ONLINE RESOURCES AVAILABLE FOR DOWNLOAD

<https://silcasystem.co.nz/downloads/>

- Technical Specifications
- Design Statement - Compliance to B1/VM1 and B2 - Joist Span / Paver Thickness - kPa / kn Loading Tables
- PTS Product Technical Statement
- Install Guide - Typical Timber Deck Frame
- Install Guide - Outdure Qwickbuild Frame
- Architectural Details Suite
- E2/AS1 Extract - Permeability and Level Entry
- Silca on pedestal information sheet
- Terms and Conditions of Sale
- Further product information
- Gallery and project inspiration
- FAQs and Contact info



PACKING	
Grates per pallet	(SP1) = 162
Pallet dimension	1 x 1.2 x 1.18H m
Coverage per pallet load	(SP1) = 29.45m ²
Weight per pallet load (incl. Pallet)	(SP1) = 311.868 kg
Grates per fcl (sp1) (standard 20')	3,564
Pallets per fcl (sp1)	22
Coverage per container	648 m ²






Silca System NZ

E: info@silcasystem.co.nz

W: www.silcasystem.co.nz



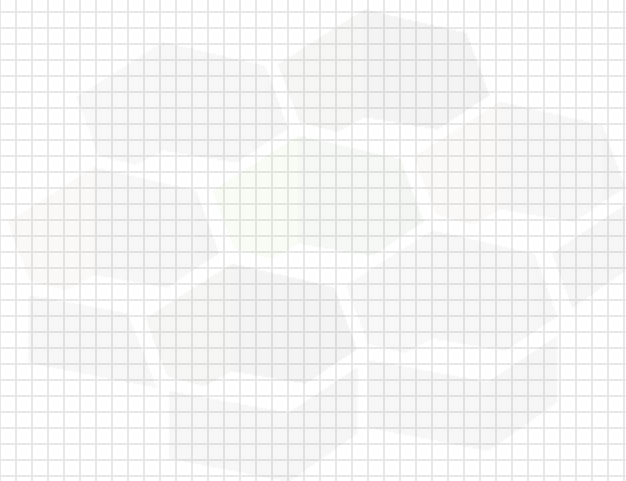

Silca®
SYSTEM

Silca System NZ

E: info@silcasystem.co.nz

W: www.silcasystem.co.nz

